



ecowarm®
RADIANTBOARD™

PREMIUM PLY RADIANT PANELS

Substrate: 6-7 Layer Plywood

Nominal Dimensions: 23.5" x 47"

Thickness: 3/4"

Groove Depth: 5/8"

PEX: 1/2" Nominal ASTM F 876-877 PEX

Groove Distance: 11.75" OC

Weight: 2.1 LBS / SQFT 16.4 LBS / Board

Board Mix: 62% Straight. 38% End Combo


Pallet Size: 4'x4'x4' Full.

Pallet Capacity: 74 per Pallet

Packaging: Corner Protected. Shrink Wrapped.

Pallet Weight: 1,221 LBS

ECOWARM® RADIANTBOARD™ DATA SHEET

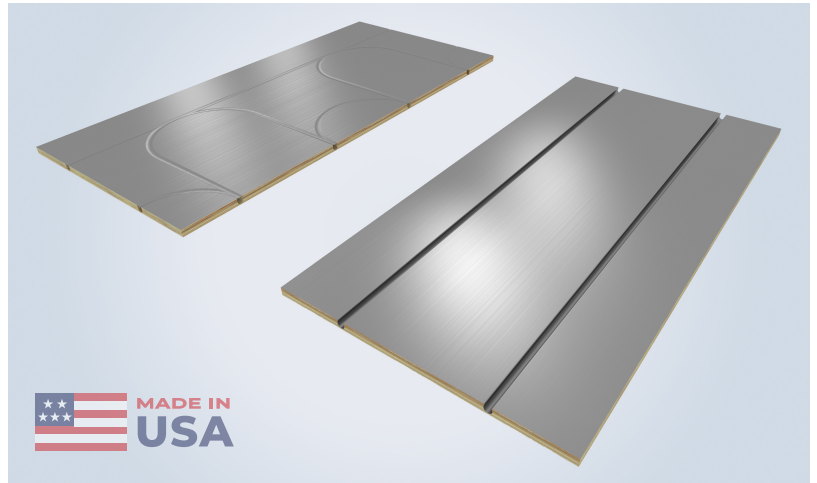

Ecowarm Radiantboard are constructed with 6-7 layer plywood with aluminum laminated surface. Panels are designed for application over subfloor, concrete, or walls and ceilings. The grooved surface creates the pathway into which 1/2" PEX tubing is placed. Our system can be used under almost any finished floor covering.

We've been manufacturing our patented radiant heating panels since 2000. The Ecowarm system is lightweight, fast responding, easy to install, and operates at a low water temperature resulting in high efficiency and lower operating costs.

ECOWARM PART NUMBERS

STRAIGHT: ECO-EWP-S2

END COMBO: ECO-EWP-C2