
WBI
THE RADIANT PANEL COMPANY

ECOWARM® RADIANTBOARD™ DATA SHEET

ecowarm® RADIANTBOARD™

PREMIUM PLY RADIANT PANELS

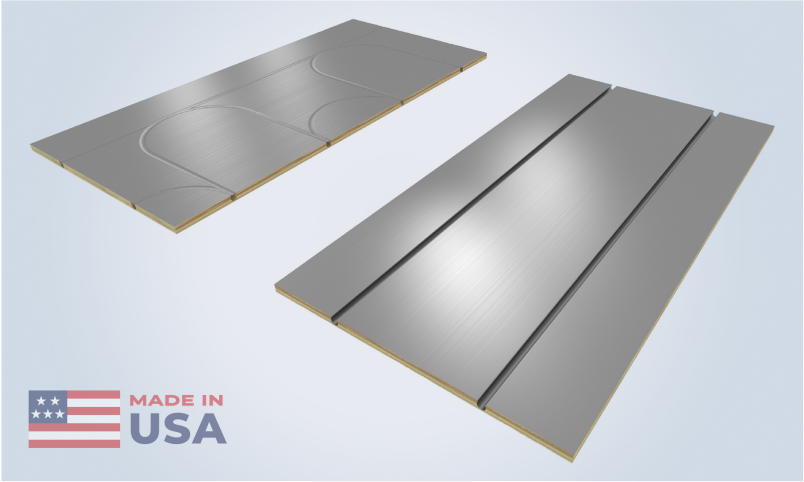

Substrate: 6-7 Layer Plywood

Nominal Dimensions: 23.5" x 47"

Thickness: 3/4"

Groove Depth: 5/8"

PEX: 1/2" Nominal; ASTM F876 / ASTM F877

Groove Distance: 11.75" OC

Weight: 2.07 lb/sq. ft.; 15.9 lb/board

Board Mix: 62% Straight. 38% End Combo

Pallet Size: 4' x 4' x 4' Full.

Pallet Capacity: 74 per Pallet

Packaging: Corner Protected. Shrink Wrapped.

Pallet Weight: 1,221 lb

Ecowarm RadiantBoard panels are constructed with 6-7 layer plywood and an aluminum-laminated surface. Panels are designed for installation over subfloors, concrete, walls, and ceilings. The grooved surface creates the pathway for 1/2-inch PEX tubing. The system can be used under almost any finished floor covering.

We've been manufacturing our patented radiant heating panels since 2000. The Ecowarm system is lightweight, fast responding, easy to install, and operates at a low water temperature for high efficiency and lower operating costs.

ECOWARM **PART NUMBERS**

STRAIGHT: ECO-EWP-S2

END COMBO: ECO-EWP-C2